BriskHeat® ECONO Standard Drum and Pail Heater

Product Highlights



Good 3.6" (91mm) coverage area



Economical choice



Good durability and flexibility



Grounded serpentine wound heating element meets NEC 427.23



Easy adjustable thermostat control



Designed for metal drums and pails



((

(see page A-2 for more information)

Specifications:


- Heating element is laminated between two layers of 15 mil fiberglass reinforced silicone rubber
- Silicone rubber density of 16.8 oz/yd² (570 grams/m²) per layer
- Patented grounded heating element
- Dielectric strength of over 2000 volts
- Adjustable thermostat, 50-425°F (10-218°C)
- 450°F (232°C) maximum exposure temperature on heating surface
- · Moisture and chemical resistant
- Power cord 6 feet (1.8m) long
- The spring closure can be expanded 3" (76mm)

Moisture and Chemical Resistant



425°F (218°C)



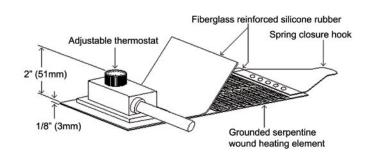

Ordering Information:

| Gallon (Liter) Size | Diameter in (mm) | Total Wattage | Length in (mm) | Width in (mm) | Part Number | |
|------------------------|---------------------|------------------|-------------------|------------------|-------------|-----------|
| | | | | | 120VAC | 240VAC |
| 5 (19) | 11.1 (282) | 300 | 35.0 (889) | 3.6 (92) | ECONO5-1 | ECONO5-2 |
| 15 (57) | 14.0 (355) | 500 | 44.0 (1118) | 3.6 (92) | ECONO15-1 | ECONO15-2 |
| 30 (114) | 18.6 (473) | 750 | 58.5 (1496) | 3.6 (92) | ECONO30-1 | ECONO30-2 |
| 55 (208) | 22.3 (565) | 1100 | 70.0 (1778) | 3.6 (92) | ECONO55-1 | ECONO55-2 |

120VAC includes NEMA 5-15 plug / 240VAC bare wires