

F/L Series

DIN W72×H72, W144×H72mm Of 8 Digit Up/Down Counter

■ Features

- 8 digits counter: Selectable Up, Down, Up/Down mode
- Counting speed: 1cps, 30cps, 2kcps, 5kcps
- Selectable voltage input (PNP) or no-voltage input (NPN)
- Decimal point setting (Fixed decimal point of display)
- Wide range of power supply: 100-240VAC 50/60Hz
12-24VAC 50/60Hz, 12-24VDC universal
- Built-in Microprocessor

⚠ Please read "Caution for your safety" in operation manual before using.



■ Ordering Information

F	8	A	
			Output
			Digit
			Size
			A Single preset
			B Indicator
			8 99999999 (8digit)
			F DIN W72×H72mm
			L DIN W144×H72mm

■ Specifications



Model	Single preset	F8A	L8A
	Totalizer (Indicator)	F8B	L8B
Digit		8digit	
Digit size		W4×H8mm	W6.3×H10mm
Power supply	AC power	100-240VAC 50/60Hz	
	AC/DC power	12-24VAC 50/60Hz, 12-24VDC	
Allowable voltage range		90 to 110% of rated voltage	
Power consumption	AC power	• Indicator: Max. 5.4VA • Single preset: Max. 6.1VA (100-240VAC 50/60Hz)	
	AC/DC power	• Indicator: Max. 5.5VA • Single preset: Max. 6.3VA (12-24VAC 50/60Hz) • Indicator: Max. 2.6W • Single preset: Max. 3.1W (12-24VDC)	
Max. counting speed		Selectable 1cps/30cps/2kcps/5kcps by internal DIP switch	
Min. signal width	RESET input	Approx. 20ms	
Input type	CP1, CP2 Input	[Voltage input] Input impedance: 5.4kΩ, "H" level voltage: 5-30VDC, "L" level voltage: 0-2VDC [No-Voltage input] Impedance at short-circuit: Max. 1kΩ, Residual voltage at short-circuit: Max. 2VDC, Impedance at open-circuit: Min. 100kΩ	
	RESET input		
One-shot output time		0.05 to 5sec	
Control output	Con- tact	Type	Single preset: SPDT (1c)
		Capacity	250VAC 3A resistive load
	Solid- state	Type	Single preset type: 1 NPN open collector
		Capacity	30VDC Max. 100mA Max.
Memory protection		Approx. 10 years (When using non-volatile semiconductor memory)	
External power		12VDC±10% 50mA Max.	
Insulation resistance		100MΩ (at 500VDC megger)	
Noise strength	AC power	±2kV the square wave noise (pulse width: 1μs) by the noise simulator	
	DC power	±500V the square wave noise (pulse width: 1μs) by the noise simulator	
Vibration	Mechanical	0.75mm amplitude at frequency of 10 to 55Hz (for 1 min.) in each X, Y, Z direction for 1 hour	
	Malfunction	0.5mm amplitude at frequency of 10 to 55Hz (for 1 min.) in each X, Y, Z direction for 10 min.	
Shock	Mechanical	300m/s ² (approx. 30G) in each X, Y, Z direction for 3 times	
	Malfunction	100m/s ² (approx. 10G) in each X, Y, Z direction for 3 times	
Relay life cycle	Mechanical	Min. 10,000,000 operations	
	Electrical	Min. 100,000 operations (250VAC 3A at resistive load)	
Environment	Ambient temperature	-10 to 55°C, storage: -25 to 65°C	
	Ambient humidity	35 to 85%RH, storage: 35 to 85%RH	
Unit weight		F8A: Approx. 287g, F8B: Approx. 253g	L8A: Approx. 500g, L8B: Approx. 446g

※Environment resistance is rated at no freezing or condensation.

8 Digit Up/Down/Up-Down Counter


■ Dimensions

• F Series





• Panel cut-out

(unit: mm)




• L Series

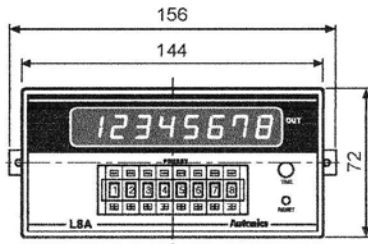


• Panel cut-out

(unit: mm)




■ Connections


• F8A

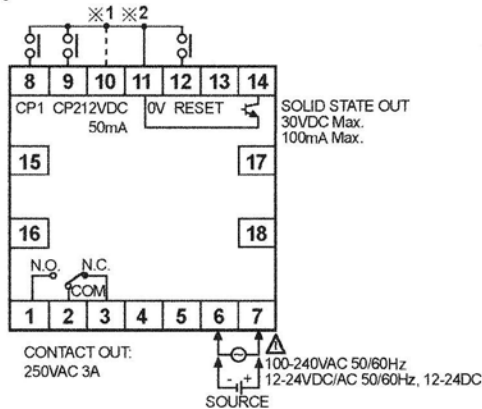


• F8B

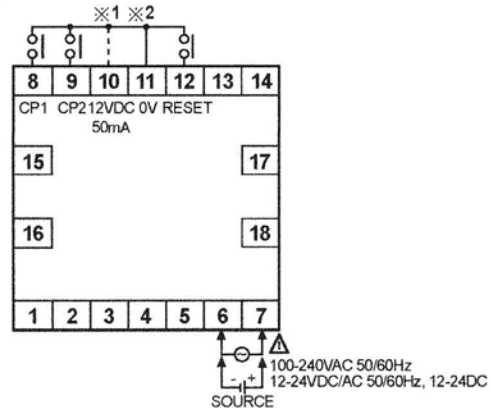

• L8A

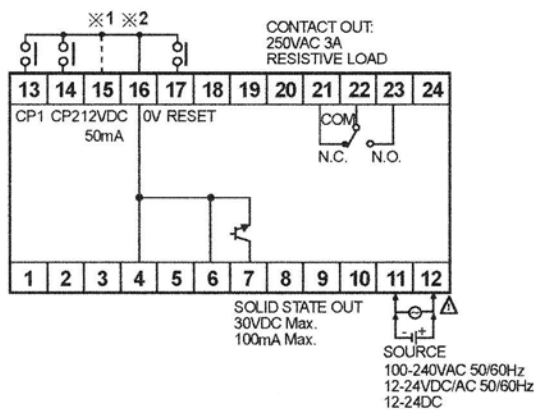

• L8B

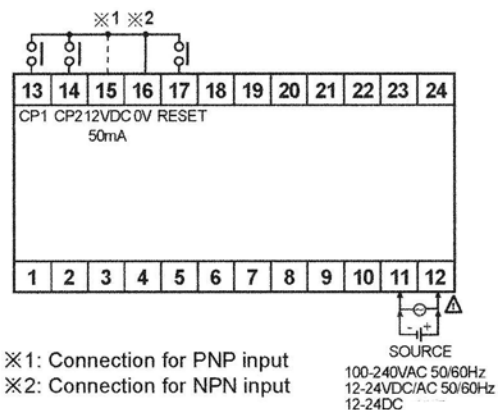

※1: Connection for PNP input
 ※2: Connection for NPN input

(A)	Photoelectric Sensors
(B)	Fiber Optic Sensors
(C)	Door/Area Sensors
(D)	Proximity Sensors
(E)	Pressure Sensors
(F)	Rotary Encoders
(G)	Connectors/ Sockets
(H)	Temperature Controllers
(I)	SSRs / Power Controllers
(J)	Counters
(K)	Timers
(L)	Panel Meters
(M)	Tacho / Speed / Pulse Meters
(N)	Display Units
(O)	Sensor Controllers
(P)	Switching Mode Power Supplies
(Q)	Stepper Motors & Drivers & Controllers
(R)	Graphic/ Logic Panels
(S)	Field Network Devices
(T)	Software

F/L Series

Input Logic Selection

• F Series


Input logic is changeable by input logic selection switch located at the one-side of case.

- No voltage input (NPN)

NPN  PNP

- Voltage input (PNP)

NPN  PNP



• L Series


Input logic is changeable by input logic selection switch located at the terminal block.

- No voltage input (NPN)

(NPN) F  S (PNP)

- Voltage input (PNP)

(NPN) F  S (PNP)




※Please be sure to turn OFF the power before changing input logic.


Input Connections

○ No voltage input (NPN)

- Solid-state input (Standard sensor: NPN output type sensor)

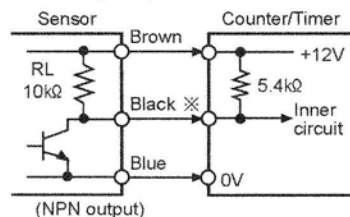


(NPN output)
※CP1, CP2, RESET input

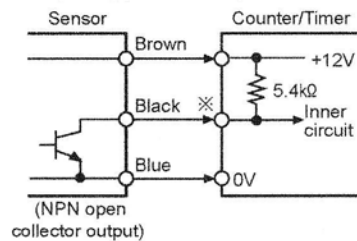

(NPN open collector output)


- Contact input




※Counting speed
: Set as 1 or 30cps

○ Voltage input (PNP)

- Solid-state input (Standard sensor: PNP output type sensor)

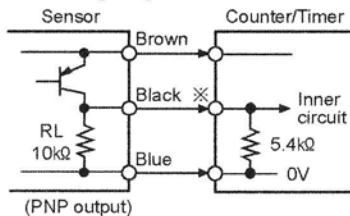


(PNP output)
※CP1, CP2 (INHIBIT), RESET input

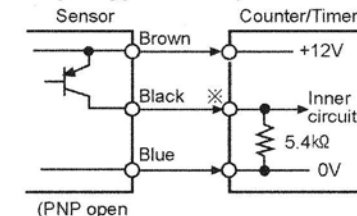

(PNP open collector output)


- Contact input



※Counting speed
: Set as 1 or 30cps


Input & Output Connections

○ In case of operating the load by power supply of the sensor

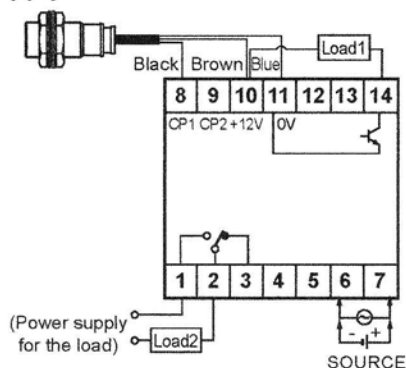

- Please select proper capacity of load, because total value of load capacity and current consumption should not be exceed current capacity (Max. 50mA).

○ In case of operating the load by external power supply

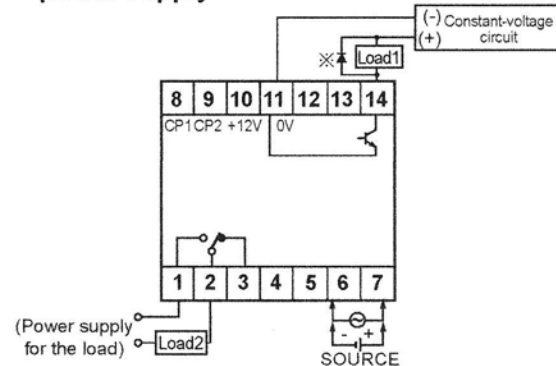


- The capacity of the load must not be exceed Max. 30VDC, Max. 100mA of the switching capacity of the transistor.
- Please do not supply the reverse polarity voltage.
- ※In case of using the inductive load (Relay, etc.), please connector the surge absorber (Diode) at both terminals of the load, in case of using the inductive load.



8 Digit Up/Down/Up-Down Counter

■ Description Of Inner DIP Switches

• F Series



• L Series

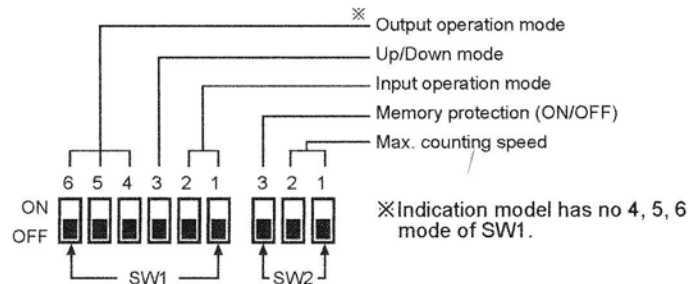

• Memory protection


SW2	Function
ON 3	Disable the memory protection
OFF 3	Enable the memory protection

• Selecting max. counting speed


SW2	Function
ON 1 2	1cps
OFF 1 2	30cps
ON 1 2	2kcps
OFF 1 2	5kcps

■ Counting Operation Of Indication Type


• Up mode

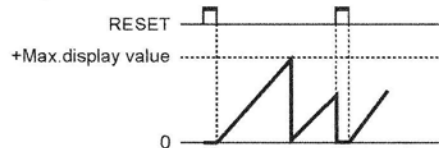


• Down mode

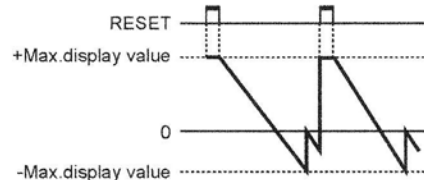

• Up / Down-A, B, C input mode

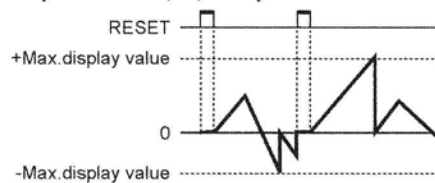


• Up / Down-D, E, F mode

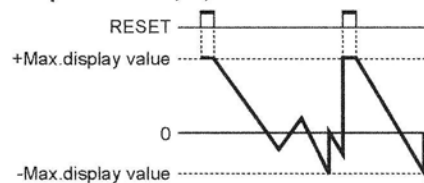

■ Setting Function Of Decimal Point

Display the decimal point.




RUN mode


※ Press RESET button for over 3sec., it advances to decimal point setting mode.



※ When "dP" is flashing, one touch the Reset button.




※ Set the position of decimal point using $\uparrow$ $\downarrow$ button of digital switch.



Return to RUN mode

※ Press RESET button for over 3sec., it returns to RUN mode.

• Changing the decimal point



※ It returns to RUN mode if no RESET button or digital switch is applied for 60sec. in decimal point setting status.

※ The decimal point setting is existed in indication type.

(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) Door/Area Sensors

(D) Proximity Sensors

(E) Pressure Sensors

(F) Rotary Encoders

(G) Connectors/ Sockets

(H) Temperature Controllers

(I) SSRs / Power Controllers

(J) Counters

(K) Timers

(L) Panel Meters

(M) Tacho / Speed / Pulse Meters

(N) Display Units

(O) Sensor Controllers

(P) Switching Mode Power Supplies

(Q) Stepper Motors & Drivers & Controllers

(R) Graphic/ Logic Panels

(S) Field Network Devices

(T) Software

F/L Series

Input Operation Mode (Counter)

Input mode (SW1)		SW1	No-voltage input type (NPN)	Voltage input type (PNP)
Up mode ON ☐ 3 OFF ☒	Up/Down-A (Command input)	ON ☐ 1 2 OFF ☒		
	Up/Down-B (Individual input)	ON ☐ 1 2 OFF ☒		
	Up/Down-C (Phase difference input)	ON ☐ 1 2 OFF ☒		
	Up (Count up input)	ON ☐ 1 2 OFF ☒		
Down mode ON ☒ 3 OFF ☐	Up/Down-D (Command input)	ON ☐ 1 2 OFF ☒		
	Up/Down-E (Individual input)	ON ☐ 1 2 OFF ☒		
	Up/Down-F (Phase difference input)	ON ☐ 1 2 OFF ☒		
	Down (Count down input)	ON ☐ 1 2 OFF ☒		

※A: Over min. signal width, B: Over 1/2 of min. signal width.
 If the signal width of A or B is less than min. signal width, ±1 of count error occurs.

8 Digit Up/Down/Up-Down Counter

Output Operation Mode

		← One-shot output (0.05 to 5sec.)		← Retained output
Output mode (SW1)	ON OFF	Up mode UP, UP / Down-A, B, C	Down mode Down, UP / Down-D, E, F	Operation after count up
F	4 5 6 ON OFF			The display value continues until reset signal is applied and the output will be held. • Retained output will be maintained until Reset signal is applied.
N	4 5 6 ON OFF			
C	4 5 6 ON OFF			The display value returns to reset start status when display value is reached to setting value.
R	4 5 6 ON OFF			
K	4 5 6 ON OFF			The display value continues until reset signal is applied.
P	4 5 6 ON OFF			
Q	4 5 6 ON OFF			The display value continues during one-shot output time.
S	4 5 6 ON OFF			
		Up input	Down input	
		Up, Up / Down-A, B, C	Down, Up / Down-D, E, F	

※ One-shot output time is set by front TIME adjuster.

(A) Photoelectric Sensors
(B) Fiber Optic Sensors
(C) Door/Area Sensors
(D) Proximity Sensors
(E) Pressure Sensors
(F) Rotary Encoders
(G) Connectors/ Sockets
(H) Temperature Controllers
(I) SSRs / Power Controllers
(J) Counters
(K) Timers
(L) Panel Meters
(M) Tacho / Speed / Pulse Meters
(N) Display Units
(O) Sensor Controllers
(P) Switching Mode Power Supplies
(Q) Stepper Motors & Drivers & Controllers
(R) Graphic/ Logic Panels
(S) Field Network Devices
(T) Software

F/L Series

■ Proper Usage


○ Reset function

● Reset

In case of changing the input mode after supplying the power, please take an external reset or manual reset. **If reset is not executed, the counter will be working as previous mode.**

● Reset signal width


It is reset perfectly when the reset signal is applied during **min. 20ms** regardless of the contact input & solid-state input.

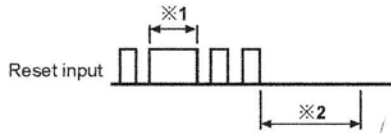

※1: In case of a contact reset, it is reset perfectly if the ON time of reset signal is applied during min. 20ms even though a chattering occurs.

※2: It can be input the signal of CP1 & CP2 after min. 50ms from closing time of reset signal.

○ Min. signal width of CP1, CP2 input




※1: Please make duty ratio (ON/OFF) as 1:1.

※2: Min. signal width

1cps: Min. 500ms
30cps: Min. 16.7ms
2kcps: Min. 0.25ms
5kcps: Min. 0.1ms

○ Max. counting speed

This is a response speed per 1 sec. when the duty ratio (ON:OFF) of input signal is 1:1. If the duty ratio is not 1:1, the width between ON and OFF should be over min. signal width and the response speed is getting slower against input signal. If either ON or OFF signal is shorter than minimum signal width, this product may not respond.



Therefore T_a (ON width) and T_b (OFF width) needed to be over min. signal width.

Max. counting speed is 1/2 value of rated spec. when duty ratio is 1:3.


It can not respond if it is smaller than min. signal width (T_a).

○ Error display

Error signal	Error description	Returning method
Err0	Zero setting status	Change the setting value to non zero status


※When Error is displayed, the output continues OFF state.

※There is no Error function in indicator.




○ Power

The inner circuit voltage starts to rise up for the first 100ms after power on, the input may not work at this time. And also the inner circuit voltage drops down for the last 500ms after power off, the input may not work at this time.



■ Case & DIP Switch Detachment

● F Series




Push a lock part to front direction and widen it simultaneously.

※Please be careful to use with tools, it may cause injury.

● L Series

Please turn off the power before detaching the case.



Unscrew the rear bolt, and pull the body forward.

※Please be careful of the injury caused by tools.