

HX SERIES, SPIRAL FLUOROPOLYMER (PTFE) HEATERS						
WATTS	VOLTS	HOT ZONE In./(mm)	OVERALL LENGTH In./(mm)	MAX. COLD ZONE In./(mm)	MODEL NUMBER	SHIP WGT. Lbs./(kg)
500	120	5	11	41	HX5111**	6
	240	(125)	(280)	(1040)	HX5211**	(2.5)
1000	120	7	11	41	HX1111**	7
	240	(180)	(280)	(1040)	HX1211**	(3.5)
2000	120	12	17	40	HX2117**	8
	240	(305)	(430)	(1015)	HX2217**	(4)
	480				HX2417**	
3000	240	16	23	40	HX3223**	13
	480	(405)	(585)	(1015)	HX3423**	(6)
4000	240	20	29	40	HX4229**	15
	480	(510)	(735)	(1015)	HX4429**	(7)
5000	240	25	35	36	HX5235**	18
	480	(635)	(890)	(915)	HX5435**	(8)
6000	240	29	40	30	HX6240**	21
	480	(735)	(1015)	(760)	HX6440**	(10)
8000	240	37	47	32	2HX8247**	25
	480	(940)	(1195)	(810)	2HX8447**	(12)
9000	240	44	54	35	2HX9254**	28
	480	(1120)	(1370)	(890)	2HX9454**	(13)

Single phase only.

Product Features and Benefits:

- ◆ **SUPERIOR CHEMICAL RESISTANCE:** Inert to most aqueous acid, alkaline, anodizing and pickling solutions up to 212°F (100°C).
- ◆ **RUGGED CONSTRUCTION:** Heavy wall fluoropolymer (PTFE) covered stainless steel element reduces permeation and eliminates the need for gas purge systems. Guaranteed 100% pinhole free.
- ◆ **OUTSTANDING PERFORMANCE:** Low watt density design (10 watts/square inch, 1.5w/cm²) for long service life.
- ◆ **CORROSION RESISTANT HEAD:** Vapor tight, flame retardant polypropylene terminal enclosure with 3-foot (.9m) flexible PVC liquid tight conduit.
- ◆ **SAFETY FEATURES:**
 - Grounded internal metal element.
 - Thermal protector built in. Replaceable PT-I fuse standard for solutions up to 190°F (88°C).
 - Non-floating construction.
- ◆ **CERTIFICATIONS:** UL (1-6 kW), CSA, and CE.
- ◆ **SIZES:** 500 watts to 9,000 watts.
- ◆ **VOLTAGES:** 120, 240 or 480 volts. 208, 380, 415, 600 and other voltages available. Single phase only.
- ◆ **OPTIONS AVAILABLE** (consult factory):
 - Replaceable thermal protectors:
 - PT-IM: for solutions from 190°F (88°C) to 220°F (104°C).
 - Resettable thermal protectors:
 - PT-II: bi-metal switch for solutions up to 190°F (88°C).
 - PT-III: type-J thermocouple for solutions from 190°F (88°C) to 210°F (99°C).
 - PIII: type-J thermocouple for solutions from 210°F (99°C) to 250°F (121°C).
 - Longer vertical lengths (cold zones).
 - Polypropylene guards: recommended for applications up to 180°F (82°C).
 - Fluoropolymer (PTFE) guards: recommended for chromic acid or solutions over 180°F (82°C).
 - Special configurations.
 - Longer wire and conduit lengths.
 - Flexible continuous fluoropolymer leads (PIII protector only).
 - Lower watt densities for highly viscous solutions and technical acids.
 - Temperature and level controls sized to match the heater.

ANDERSON-BOLDS

24050 COMMERCE PARK • CLEVELAND, OHIO 44122

CLEVELAND • COLUMBUS • CINCINNATI


(216) 360-9800

(614) 885-3933

(513) 528-5680

www.anderson-bolds.com

DIMENSIONS (up to 6 kW)

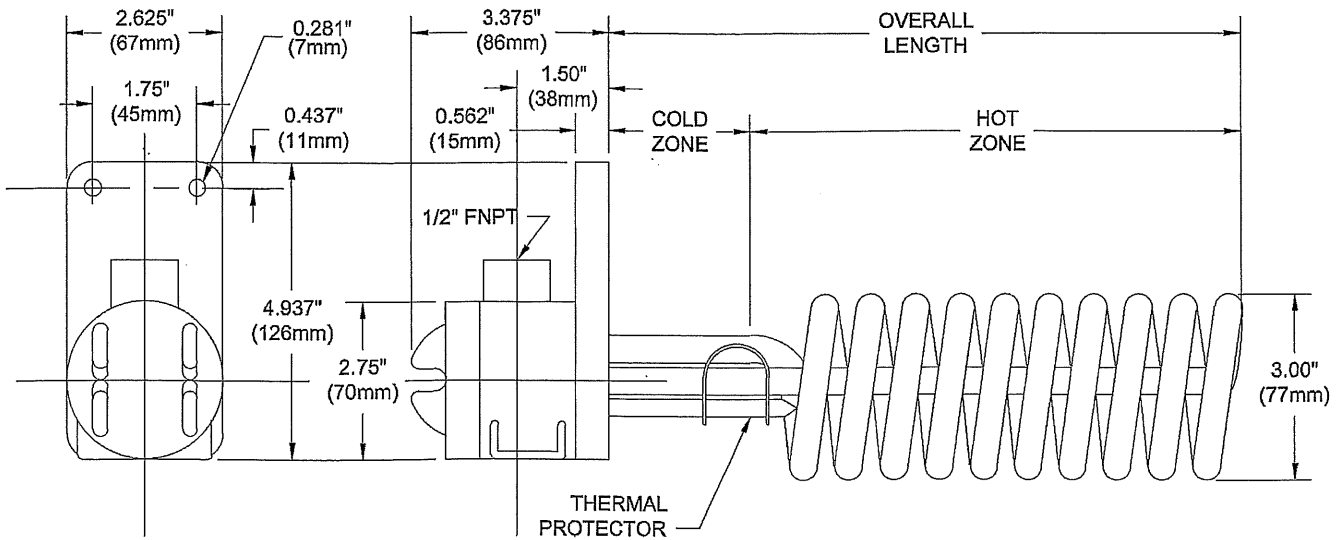

SPIRAL OVER THE SIDE FLUOROPOLYMER (PTFE) HEATER

Series	Wattage	Voltage	Overall Length	Options	Type of Fuse	Wire and Conduit Length
	.5 = 500 1 = 1000 2 = 2000 3 = 3000 4 = 4000 5 = 5000 6 = 6000 8 = 8000 9 = 9000	1 = 120 2 = 240 4 = 480 -208 = 208 -277 = 277 -380 = 380 -415 = 415 -600 = 600	11 = .5kW 11 = 1kW 17 = 2kW 23 = 3kW 29 = 4kW 35 = 5kW 40 = 6kW 47 = 8kW 54 = 9kW specify custom lengths, not to exceed tank depth			no designator = 36" length standard specify variations from standard Ex: -X84 = 84"
	HX = PTFE sheathed 2HX = 2 element PTFE sheathed HS = 304 stainless steel 2HS = 2 element 304 stainless steel				Replaceable Fuse	
					-PT-I (std) for solutions up to 190°F -PT-IM for 190° - 220°F solutions	
					Resettable Fuse (additional control components required)	
					-PT-II for solutions up to 190°F -PT-III for 190° - 210°F solutions -PIII for 210° - 250°F solutions	
X = any special configuration not called out in the part number (specify in clear text) -C = complete with guard						

ANDERSON-BOLDS

24050 COMMERCE PARK • CLEVELAND, OHIO 44122
 CLEVELAND • COLUMBUS • CINCINNATI
 (216) 360-9800 (614) 885-3933 (513) 528-5680
www.anderson-bolds.com