


Solid State Relays Zero Switching Type RMD Hybrid Relay

CARLO GAVAZZI

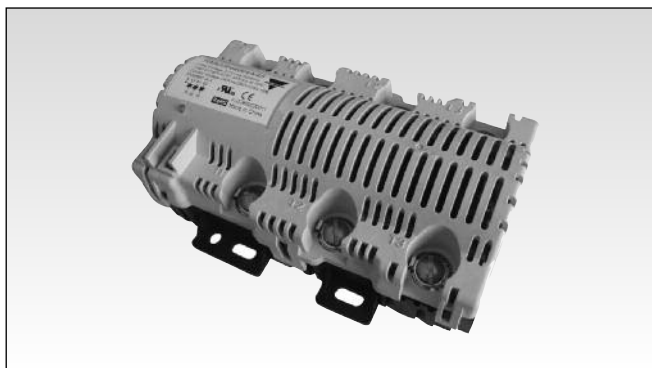

- Hybrid Relay: SSR + EMR combination
- Current rating @ 60°C: 30 AAC, 40 AAC
- Nominal voltage ratings: 240 VAC, 227 VAC/ 480 VAC + Neutral
- Control voltage: 24 VAC, 120 VAC, 240 VAC
- Mercury-free, leading to a safer environment
- Similar mounting to mercury relays
- RoHS compliant
- Switching with arc-free operation
- Switching rate: up to 20 cycles per minute
- Operating life: 4 million operating cycles

Product Description

RMD3H combines the benefits of solid state relays and electro-mechanical relays to provide a hybrid relay. This means that there is virtually no contact arcing and much less heat emission inside the panel. RMD3H switches heaters on three legs while RMD2H has two poles which are switched and the

third one is directly connected between the L2 and the T2 terminals.

This hybrid relay also provides a solution which does not contain mercury and is RoHS compliant. The maximum current reached per pole is 40AAC in a surrounding temperature of 60°C (140°F).

Ordering Key

RMD 3 H 48 HA 40

Hybrid Relay _____
 Number of poles _____
 Platform _____
 Rated Voltage _____
 Control voltage _____
 Rated Operational current _____

Selection Guide

Rated Voltage	Blocking Voltage	Number of switched Poles	Rated Control Voltage	Rated operational current at 60°C surrounding temperature	
				30 Arms	40 Arms
240Vrms (1phase loads)	600Vp	2	24 VAC/DC	RMD2H24LA30	RMD2H24LA40
(3phase delta)			120 VAC	RMD2H24MA30	RMD2H24MA40
			240 VAC	RMD2H24HA30	RMD2H24HA40
240Vrms (3phase delta)	600Vp	3	24 VAC/ DC	RMD3H24LA30	RMD3H24LA40
			120 VAC	RMD3H24MA30	RMD3H24MA40
			240 VAC	RMD3H24HA30	RMD3H24HA40
480Vrms (3phase star+Neutral)	600Vp	3	24 VAC/ DC	RMD3H48LA30	RMD3H48LA40
			120 VAC	RMD3H48MA30	RMD3H48MA40
			240 VAC	RMD3H48HA30	RMD3H48HA40

General Specifications

	RMD..24	RMD..48
Operational voltage Range	240 VAC -15% / +10%	277 VAC (480 VAC with neutral connection) -15%/+10%
Non-rep peak voltage	600 Vp	
Operational frequency range	45 - 65Hz	
Power factor	> 0.90	
CE marking	Yes	
Finger Protection	IP20	
Operating life	4 million cycles	
Control input status	continuously ON Green LED when control input is applied	
Varistor protection across outputs	420V	
Pollution degree	2 (non-conductive pollution with possibilities of condensation)	
Over-voltage category	III (fixed installations)	
Isolation - input to Output	4000Vrms	
RoHS compliance	YES	


Input Specifications

	RMD..LA	RMD..MA	RMD..HA..
Rated Control voltage range	24 VAC/DC +10/-15%	120 VAC +10/-15%	240 VAC +10/-15%
Pick-up voltage	15 VAC/ 9 VDC	36 VAC	90 VAC
Drop-out voltage	15 VAC/ 9 VDC	36 VAC	90 VAC
Maximum Input current	400 mA	400 mA	400 mA
Response time pick-up ZC	0.5 cycle	0.5 cycle	0.5 cycle
Response time drop-out	2 cycles	2 cycles	2 cycles

Output Specifications

	RMD..30	RMD..40
Rated operational current (see derating curve)	30 AAC	40 AAC
Min. operational current	150 mA	150 mA

Derating Curves

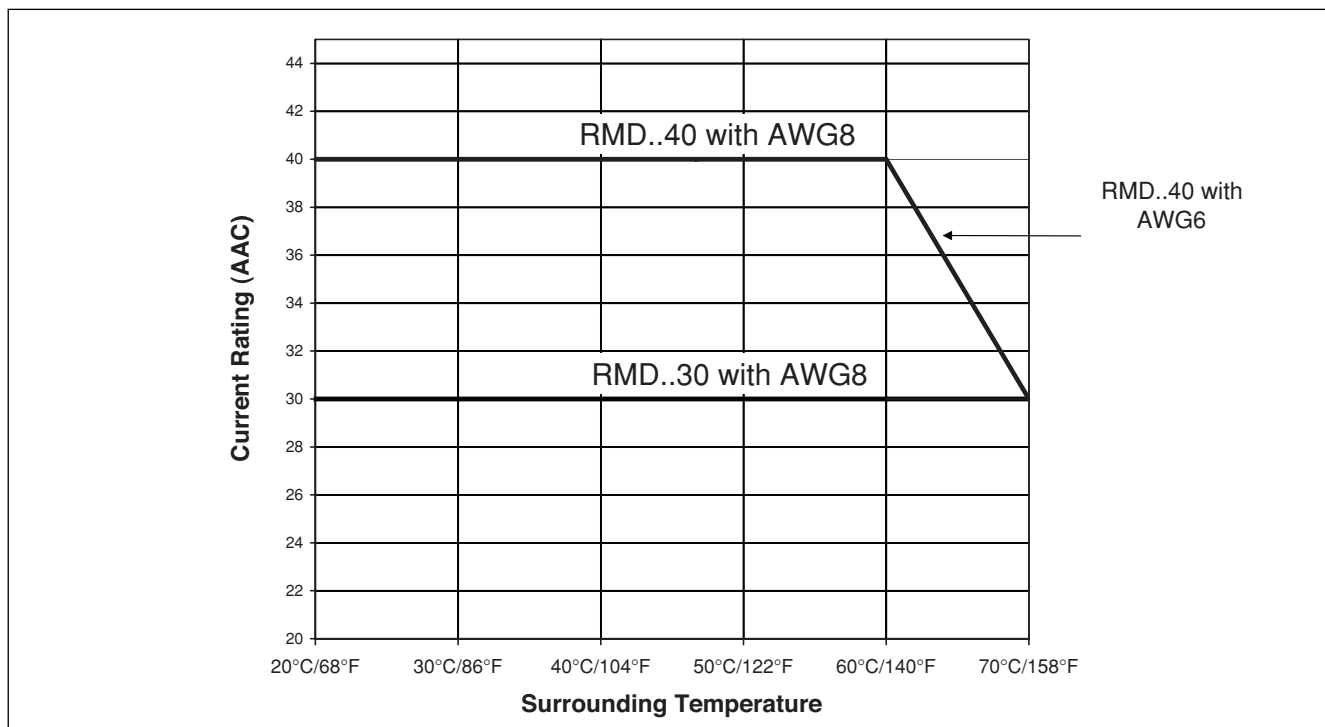



Agency Approvals & EMC

CE marking		Approvals	cURus (E80573)
Low Voltage Directive	IEC / EN 60947-4-3	Endurance Test	100,000 cycle as per UL508
EMC Immunity	IEC / EN 61000-6-3	Restrictions of hazardous substances	RoHS
EMC Emission	IEC / EN 61000-6-1	Radiated Radio Frequency Immunity	EN 61000-4-3
Electrostatic Discharge (ESD) Immunity	IEC / EN 61000-4-2 8kV, PC2 Air discharge 4kV, PC2 Contact	10 V/m, 80 - 1000 MHz, 1.4 - 2.0 GHz 1 V/m, 2.0 - 2.7 GHz	Performance criteria 1 Performance criteria 1
Electrical Fast Transient Burst Immunity	IEC / EN 61000-4-4 Output 2kV, performance criteria 1 Input 1kV, performance criteria 1	Conducted Radio Frequency Immunity	IEC / EN 61000-4-6 Performance criteria 1
Electrical Surge Immunity	IEC / EN 61000-4-5 Output, line to line 1kV, performance criteria 1 Output, line to earth 2kV, performance criteria 1 Input, line to line 1kV, performance criteria 2 Input, line to earth 2kV, performance criteria 2	Voltage Dips Immunity	IEC / EN 61000-4-11 0% for 10ms/20ms, 70% for 500ms 40% for 200ms
Radio Interference field emissions (radiated)	IEC / EN 55011 Class B (light industry)	Voltage Interruptions Immunity	IEC / EN 61000-4-11 Performance criteria 3
		Radio Interference voltage emissions (conducted)	EC / EN 55011 Class A (industrial)

Connection Specifications

Connection Type	Power Connection Screw terminal	Control Connection FASTON terminal
Illustration of terminal		
Terminal Designations	1L1, 2T1, 3L2, 4T2, 5L3, 6T3, 7N	A1, A2
Rigid (Solid or Stranded)	1 x (2.5-16)mm ² 1 x (14-6)AWG	N/A
Tightening torque	18 in lb (2.1Nm)	N/A
Size	No. 10 screw	6.35mm (1/4 inch) FASTON
Aperture for termination lug	Max 13.5mm for ring and fork/spade termination lugs	

Housing Specifications

Weight	approx. 360g
Housing Material	PA66
Flame class	UL94V0
Dimensions (w x h x d) (without input connector)	105 x 45 x 90 mm


Environmental Specifications

Operating Temperature	0 to 70°C
Storage Temperature	0 to 100°C
Humidity	95% RH, non condensing @ 40°C
Impact resistance	15/11 g/ms

Connection Diagrams


RMD2H

Line to line voltage: 240 VAC

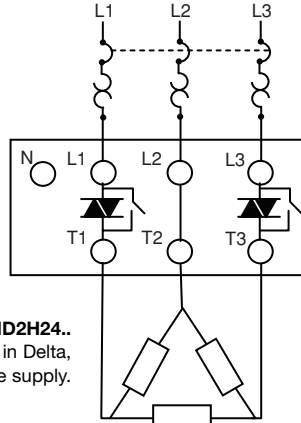

3pole, 2 phase switching - RMD2H24..
240V heaters connected in Delta,
with 240V 3-phase supply.

240 VAC

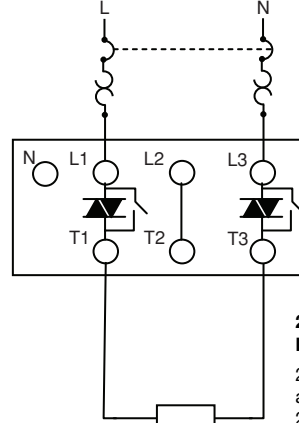


2pole, 1 phase switching - RMD2H24..

240V heater with switched Neutral
and Main Supply connection, in a
240V 1-phase system.

RMD3H


Line to line voltage: 240 VAC

Circuit breaker

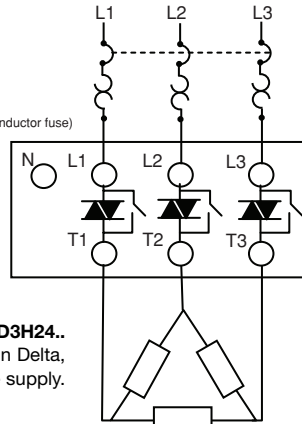Overload protection
(may also be semiconductor fuse)

3pole, 3 phase switching - RMD3H24..
240V heaters connected in Delta,
with 240V 3-phase supply.

480 VAC

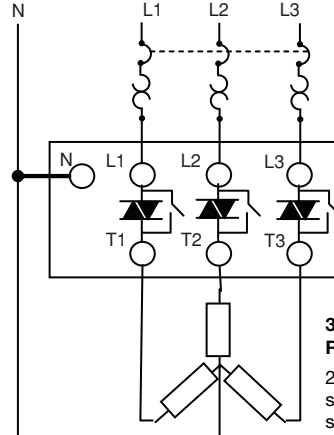

3pole, 3 phase switching - RMD3H48..

240V heaters connected in
star(wye) with Neutral connection
supplied by a 480V 3-phase
system.

WARNING: Internal power supply in RMD2H and RMD3H24 is taken through terminals L1-L3, while for RMD3H48 it is taken through L1-N. If these are not connected correctly, the internal bypass relays will not work. The 'N' terminal must be left unconnected for RMD2H and RMD3H24.

RMD3H48HA40



Dimensions (mm)

