



# Glo Brite® Eco Exit 7000 Series PF50 Exit Signs



Going green does not have to be expensive

Job Name:	_____
Type:	_____
Approved By:	_____
Distributor:	_____

### FEATURES:

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Recycleable
- LEED points qualified

### TECHNICAL INFORMATION:

Sizes: 15-3/8" x 8-3/4" x 3/4"  
 Letter size: 7/8" stroke with 7" height  
 Background: Black, Red, Green  
 Illumination: High Visibility Green  
 Visibility: 50 feet  
 Directional: (2) Chevron arrows included for easy direction selection  
 Construction: ABS plastic with photoluminescent panel  
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

### TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL;  
 Meets NFPA Life Safety Code 101 and OSHA requirements;  
 International Building Code 2007 Supplement

**LIFE EXPECTANCY:** 25+ years

### POWER REQUIREMENTS:



NO additional electrical or mechanical source required

### INSTALLATION:


Surface, flag, ceiling or stem mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

### APPLICATIONS:

Both high-level and low-level  
 Life Expectancy 25+ years

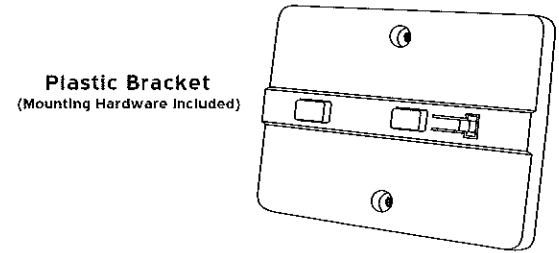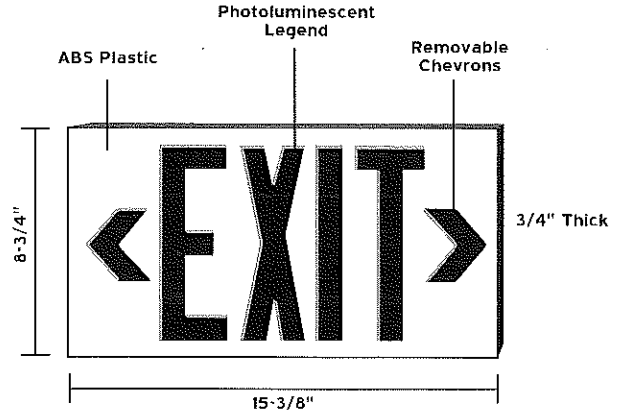

Flag Mount Option



Ceiling Mount Option

Catalog #	Frame Color	No. of Faces	Mounting Bracket
70	6 - Black	0 - Single Sided	B - Bracket
	5 - Red	2 - Double Sided	CDT-B - Conduit Bracket
	4 - Green		
70	_____	_____	- B _____ (fill in for model #)
For example: 7062-B (Double sided Black with bracket)			

Other photoluminescent components of the Glo Brite® Safety Guidance System include:  
 Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows,  
 Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.

## ANDERSON-BOLDS

24050 COMMERCE PARK • CLEVELAND, OHIO 44122  
 CLEVELAND • COLUMBUS • CINCINNATI  
 (216) 360-9800 (614) 885-3933 (513) 528-5680  
[www.anderson-bolds.com](http://www.anderson-bolds.com)

