


# Safety Light Curtains Body Resolution Series SB4-\*/\*-D50 and SB4-\*/\*-D25

216-360-9800

CARLO GAVAZZI

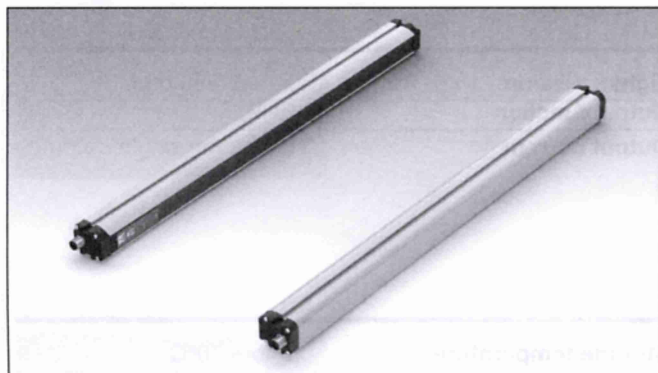

- Safety Category 4 in conformity with EN 61496-1 and /-2
- Body resolution
- On board DIP-Switch selectable functions
- Failure diagnosis by LEDs
- Easy alignment and mounting procedure
- Compact dimensions
- Approvals:



## Product Description

Safety Light Curtains of Safety Category 4 in conformity with EN 61494-1 /-2.

The SB4- body resolution series is provided with partial / total muting function, automatic / manual restart mode. All the software dedicated is

on board and the functions above can be selected and adjusted through the DIP switches placed in the receiver unit. The SB4 light curtain series can be effectively adopted along with the respective safety relay NL1/3-D, obtaining a complete safety package for many industrial applications.

## Ordering Key

**SB4-315/915-D50**

Safety Barriers \_\_\_\_\_  
Safety Category \_\_\_\_\_  
Resolution \_\_\_\_\_  
Protected Height \_\_\_\_\_  
Operating Distance \_\_\_\_\_

## Type Selection

Height of the protected area	Resolution	Number of beams	Overall height H	Ordering no. Op. distance 25 m (82')	Ordering no. Op. distance 50 m (164')
515mm (20.28")	515mm (20.21")	2	652mm (25.66")	SB4-515/515-D25	SB4-515/515-D50
815mm (32.09")	415mm (16.34")	3	952mm (37.48")	SB4-415/815-D25	SB4-415/815-D50
915mm (36.02")	315mm (12.4")	4	1052mm (41.42")	SB4-315/915-D25	SB4-315/915-D50
1215mm (47.83")	415mm (16.34")	4	1342mm (52.83")	SB4-415/1215-D25	SB4-415/1215-D50

## General Specifications

Resolution	See Type Selection table	Other functions	Override
Scanning distance	See Type Selection table	Response time	14 ms
Dip-Switch selectable functions	Automatic or manual reset Partial or total muting		

Electrical Specifications

Power supply	24 Vdc $\pm$ 20%	Light emission	Infrared (880 nm)
Emitter consumption	70 mA max	Output function	2 PNP
Receiver consumption	100 mA max	Output current	0.5 max (on single output)


Environmental Specifications

Operating temperature	-10 to + 55°C	Storage temperature	-25 to + 70°C
-----------------------	---------------	---------------------	---------------

Mechanical Specifications

Receiver connection	M 12 8-pole connector Standard shielded cable length: 3, 5 or 10 m	Protection Degree	IP 65
Emitter connection	M 12 4-pole connector Standard shielded cable length: 3, 5 or 10 m	Housing material	Painted aluminum (yellow Ral 1028)
		Weight	1.2 Kg max/m of total height

Dimensions

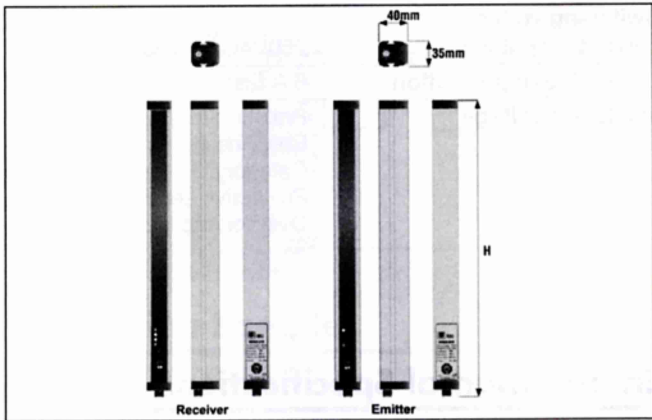

H = Overall height (see Type Selection)

Wiring Diagrams

