


Inductive Proximity Sensors

3-Wire and 4-Wire DC

Inductive Cylindrical

3- and 4-Wire DC 30 mm Diameter Inductive Sensors

- 10 to 40 mm sensing ranges
- 30 mm threaded barrels
- LED target indication
- Cable and Micro (M12) quick disconnect models

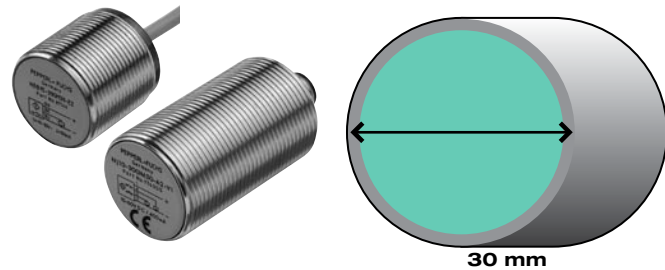

Technical Specifications

SUPPLY VOLTAGE	NBB/NBN/NEB Models	10-30 VDC
	NJ Models	10-60 VDC
LOAD CURRENT (I_L)	GM30/GM35 Models	100 mA max.
	All Other Models	200 mA max.
LEAKAGE CURRENT (OFF-STATE)	NBB/NBN/NJ Models	≤ 0.5 mA
	NEB/NEN Models	≤ 0.1 mA
OUTPUT	Suffix E, E0	NPN normally open
	Suffix E2	PNP normally open
	Suffix E3	PNP normally closed
	Suffix A0	NPN normally open & normally closed
	Suffix A2	PNP normally open & normally closed
VOLTAGE DROP AT I_L (MAX.)	NBB/NBN/NJ Models	≤ 3 VDC
	NEB/NEN Models	≤ 2 VDC
HYSTERESIS		3-15% (5% typical)
SHORT CIRCUIT AND OVERLOAD PROTECTION		Yes
REVERSE POLARITY PROTECTED		Yes
LED INDICATION		See dimension drawings
SENSING FACE MATERIAL		PBT
STANDARDS		EN 60947-5-2
ENVIRONMENTAL PROTECTION		IP67
AMBIENT TEMPERATURE		-14°F to +158°F (-25°C to +70°C)
APPROVALS		



See pages
827-874 for
cordsets




See pages
885-892 for
accessories

Wiring Diagrams

3-Wire DC




Cable Connection



Quick Disconnect

Note: Wiring diagrams show quick disconnect pin numbers.


V1 Type

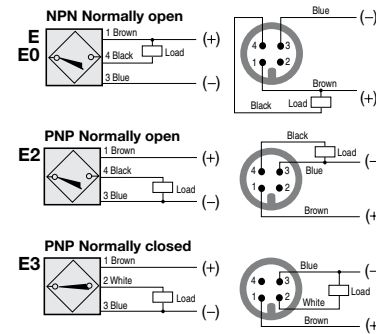

4-Wire DC




Cable Connection



Quick Disconnect

Note: Wiring diagrams show quick disconnect pin numbers.

V1 Type

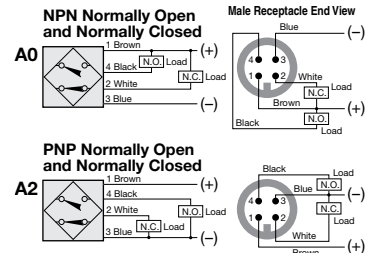

3-Wire and 4-Wire DC

Inductive Proximity Sensors

30 mm Diameter

2-Meter Cable Models

Dia. (mm)	Model Number	Range (mm)	Mounting	Electrical Output	Switching Frequency	Barrel Material*	Cable Jacket/Size	Dwg. No.
30	NJ10-30GM50-E	10	Flush	NPN N.O.	650 Hz	SS	PVC/18 AWG	1
	NJ10-30GM50-E2	10	Flush	PNP N.O.	650 Hz	SS	PVC/18 AWG	1
	NBB10-30GM50-E0	10	Flush	NPN N.O.	200 Hz	Ni-Brass	PVC/22 AWG	2
	NBB10-30GM50-E2	10	Flush	PNP N.O.	200 Hz	Ni-Brass	PVC/22 AWG	2
	NBB10-30GM60-A0	10	Flush	NPN N.O. & N.C.	200 Hz	Ni-Brass	PVC/22 AWG	3
	NBB10-30GM60-A2	10	Flush	PNP N.O. & N.C.	200 Hz	Ni-Brass	PVC/22 AWG	3
	NJ15-30GM50-E	15	Nonflush	NPN N.O.	500 Hz	SS	PVC/18 AWG	4
	NJ15-30GM50-E2	15	Nonflush	PNP N.O.	500 Hz	SS	PVC/18 AWG	4
	NBB15-30GM30-E2	15	Flush	PNP N.O.	200 Hz	Ni-Brass	PVC/22 AWG	5
	NBB15-30GM50-E0	15	Flush	NPN N.O.	200 Hz	Ni-Brass	PVC/22 AWG	6
	NBB15-30GM50-E2	15	Flush	PNP N.O.	200 Hz	Ni-Brass	PVC/22 AWG	6
	NBN15-30GM50-E0	15	Nonflush	NPN N.O.	200 Hz	Ni-Brass	PVC/22 AWG	7
	NBN15-30GM50-E2	15	Nonflush	PNP N.O.	200 Hz	Ni-Brass	PVC/22 AWG	7
	NBN15-30GM60-A0	15	Nonflush	NPN N.O. & N.C.	200 Hz	Ni-Brass	PVC/22 AWG	8
	NBN15-30GM60-A2	15	Nonflush	PNP N.O. & N.C.	200 Hz	Ni-Brass	PVC/22 AWG	8
	NBN25-30GM50-E0	25	Nonflush	NPN N.O.	200 Hz	Ni-Brass	PVC/22 AWG	9
	NBN25-30GM50-E2	25	Nonflush	PNP N.O.	200 Hz	Ni-Brass	PVC/22 AWG	9



Inductive Cylindrical

Micro (M12) Quick Disconnect Models

Dia. (mm)	Model Number	Range (mm)	Mounting	Electrical Output	Switching Frequency	Barrel Material*	Quick Disconnect	Dwg. No.
30	NJ10-30GM50-E2-V1	10	Flush	PNP N.O.	650 Hz	SS	M12 Micro	10
	NBB10-30GM50-E0-V1	10	Flush	NPN N.O.	200 Hz	Ni-Brass	M12 Micro	11
	NBB10-30GM50-E2-V1	10	Flush	PNP N.O.	200 Hz	Ni-Brass	M12 Micro	11
	NBB10-30GM60-A0-V1	10	Flush	NPN N.O. & N.C.	200 Hz	Ni-Brass	M12 Micro	12
	NBB10-30GM60-A2-V1	10	Flush	PNP N.O. & N.C.	200 Hz	Ni-Brass	M12 Micro	12
	NJ15-30GM50-E2-V1	15	Nonflush	PNP N.O.	500 Hz	SS	M12 Micro	13
	NBB15-30GM30-E2-V1	15	Flush	PNP N.O.	200 Hz	Ni-Brass	M12 Micro	14
	NBB15-30GM30-E3-V1	15	Flush	PNP N.C.	200 Hz	Ni-Brass	M12 Micro	14
	NBB15-30GM50-E0-V1	15	Flush	NPN N.O.	200 Hz	Ni-Brass	M12 Micro	15
	NBB15-30GM50-E2-V1	15	Flush	PNP N.O.	200 Hz	Ni-Brass	M12 Micro	15
	NBN15-30GM50-E0-V1	15	Nonflush	NPN N.O.	200 Hz	Ni-Brass	M12 Micro	16
	NBN15-30GM50-E2-V1	15	Nonflush	PNP N.O.	200 Hz	Ni-Brass	M12 Micro	16
	NBN15-30GM60-A0-V1	15	Nonflush	NPN N.O. & N.C.	200 Hz	Ni-Brass	M12 Micro	17
	NBN15-30GM60-A2-V1	15	Nonflush	PNP N.O. & N.C.	200 Hz	Ni-Brass	M12 Micro	17
	NBN25-30GM50-E0-V1	25	Nonflush	NPN N.O.	200 Hz	Ni-Brass	M12 Micro	18
	NBN25-30GM50-E2-V1	25	Nonflush	PNP N.O.	100 Hz	Ni-Brass	M12 Micro	18
	NEN40-30GM60-E2-V1	40	Nonflush	PNP N.O.	100 Hz	Ni-Brass	M12 Micro	19

3-Wire
and
4-Wire
DC

*SS = stainless steel, Ni-Brass = nickel-plated brass

Inductive Proximity Sensors

3-Wire and 4-Wire DC

30 mm Diameter

Look for these logos in the drawings to identify our X-Series extended range and Half Pint short-barrel sensors



X-Series™
Sensing range 25-240%
beyond "traditional"
inductive sensors




Half Pint
Short-barrel cylindrical sensors
for space-critical applications

Inductive Cylindrical

3-Wire
and
4-Wire
DC

Drawing No. 1


NJ10-30GM50-E [NPN N.O.]
NJ10-30GM50-E2 [PNP N.O.]



10 mm Sensing Range

Drawing No. 2


NBB10-30GM50-E0 [NPN N.O.]
NBB10-30GM50-E2 [PNP N.O.]



10 mm Sensing Range

Drawing No. 3


NBB10-30GM60-A0 [NPN N.O. & N.C.]
NBB10-30GM60-A2 [PNP N.O. & N.C.]



10 mm Sensing Range

Drawing No. 4


NJ15-30GM50-E [NPN N.O.]
NJ15-30GM50-E2 [PNP N.O.]



15 mm Sensing Range

Drawing No. 5


NBB15-30GM30-E2 [PNP N.O.]



15 mm Sensing Range

Drawing No. 6


NBB15-30GM50-E0 [NPN N.O.]
NBB15-30GM50-E2 [PNP N.O.]



15 mm Sensing Range

Drawing No. 7


NBN15-30GM50-E0 [NPN N.O.]
NBN15-30GM50-E2 [PNP N.O.]



15 mm Sensing Range

Drawing No. 8


NBN15-30GM60-A0 [NPN N.O. & N.C.]
NBN15-30GM60-A2 [PNP N.O. & N.C.]



15 mm Sensing Range

Drawing No. 9


NBN25-30GM50-E0 [NPN N.O.]
NBN25-30GM50-E2 [PNP N.O.]



25 mm Sensing Range

Drawing No. 10


NJ10-30GM50-E2-V1 [PNP N.O.]



10 mm Sensing Range

Drawing No. 11


NBB10-30GM50-E0-V1 [NPN N.O.]
NBB10-30GM50-E2-V1 [PNP N.O.]



10 mm Sensing Range

Drawing No. 12

NBB10-30GM60-A0-V1 [NPN N.O. & N.C.]
NBB10-30GM60-A2-V1 [PNP N.O. & N.C.]



10 mm Sensing Range

3-Wire and 4-Wire DC

Inductive Proximity Sensors

30 mm Diameter



See pages
827-874 for
cordsets




See pages
885-892 for
accessories

Inductive Cylindrical

3-Wire
and
4-Wire
DC


Drawing No. 13

NJ15-30GM50-E2-V1 [PNP N.O.]




15 mm Sensing Range

Drawing No. 14

NBB15-30GM30-E2-V1 [PNP N.O.]
NBB15-30GM30-E3-V1 [PNP N.C.]


15 mm Sensing Range

Drawing No. 15

NBB15-30GM50-E0-V1 [NPN N.O.]
NBB15-30GM50-E2-V1 [PNP N.O.]


15 mm Sensing Range

Drawing No. 16

NBN15-30GM50-E0-V1 [NPN N.O.]
NBN15-30GM50-E2-V1 [PNP N.O.]


15 mm Sensing Range

Drawing No. 17

NBN15-30GM60-A0-V1 [NPN N.O. & N.C.]
NBN15-30GM60-A2-V1 [PNP N.O. & N.C.]

15 mm Sensing Range


Drawing No. 18

NBN25-30GM50-E0-V1 [NPN N.O.]
NBN25-30GM50-E2-V1 [PNP N.O.]

25 mm Sensing Range

Drawing No. 19

NEN40-30GM60-E2-V1 [PNP N.O.]



40 mm Sensing Range

Recommended Accessories



BF30



BF 30-F



BF5-30



AB30

Mounting Brackets

Model	Description
BF30	30 mm clamp bracket
BF 30-F	30 mm snap lever bracket
BF5-30	5-30 mm universal bracket
AB30	30 mm right angle bracket

See pages 885-892 for
complete accessory listing.

Micro Cordsets

Straight "Micro" (M12)

Model	Description
V1-G-YE2M-PVC	2 m length, PVC jacket
V1-G-YE5M-PVC	5 m length, PVC jacket
V1-G-YE2M-PUR	2 m length, PUR jacket
V1-G-YE5M-PUR	5 m length, PUR jacket

Right Angle "Micro" (M12)

Model	Description
V1-W-YE2M-PVC	2 m length, PVC jacket
V1-W-YE5M-PVC	5 m length, PVC jacket
V1-W-YE2M-PUR	2 m length, PUR jacket
V1-W-YE5M-PUR	5 m length, PUR jacket



See pages 827-874 for
complete cordset listing.